

# FaceDepot-7A

Outdoor Facial Recognition Station  
with Robust and Compact Design



Proactive Facial Recognition



New Height of Anti-Spoofing



Speedy Recognition



Wide Pose Angle Acceptance



Touchless for Better Hygiene





## Features

- Enhanced Visible Light Facial Recognition with Deep Learning built-in
- 7-inch LCD display with impact-resistant glass cover
- Splash-proof design
- Wide range of lighting acceptance
- ID / MF module optional
- Maximum 10,000 face templates capacity
- High performance processor boosted by ZKTeco
- Ultrasonic distance detected sensor, 50cm ~ 150cm adjustable

### Recognition distance up to 3m long and extra wide angle recognition

The recognition distance has been greatly extended up to 3 meters long, which significantly improves maximum traffic rate. While most of algorithms only support 15-degree angle facial recognition, ZKTeco supports 30-degree angle facial recognition.

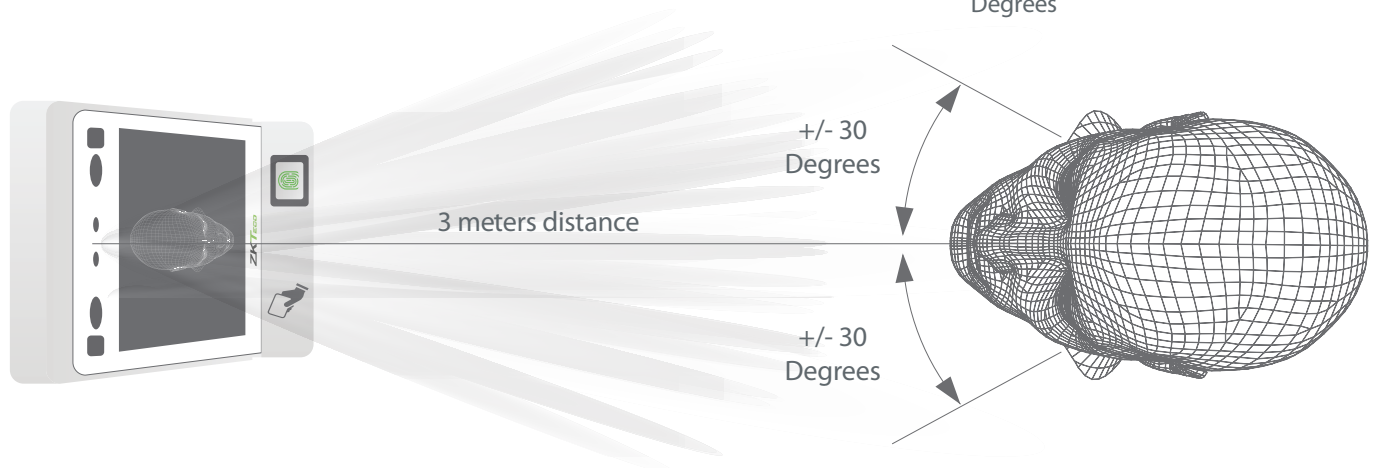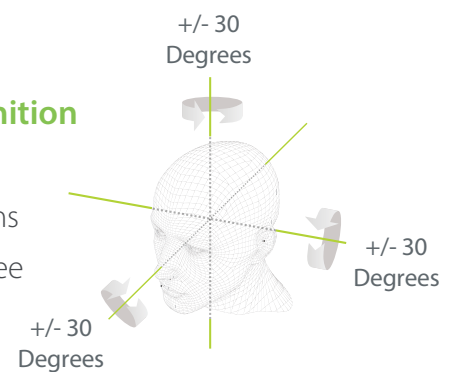


## Specifications ( **P**: Premium Feature)

|               |               |                                                                                                 |
|---------------|---------------|-------------------------------------------------------------------------------------------------|
|               | Model         | FaceDepot-7A                                                                                    |
| Hardware      | LCD           | 7-inch screen (1280 x 720 pixel)                                                                |
|               | CPU           | Quad-core A17 1.8GHz (ZKTeco boosted) <b>P</b>                                                  |
|               | Memory        | 2G RAM / 16G ROM <b>P</b>                                                                       |
|               | Camera        | 2MP dual lens                                                                                   |
|               | Communication | TCP / IP, 2ch USB, Wi-Fi (optional)<br>RS232, RS485 for external reader<br>Wiegand Input/Output |
|               | Accessory     | Door lock, door sensor, alarm, exit button and auxiliary input                                  |
|               | Audio         | 2* Loudspeaker                                                                                  |
|               | Capacity      | Users                                                                                           |
| Face Template |               | 10,000 <b>P</b>                                                                                 |
| RFID          |               | 10,000 (optional)                                                                               |
| Log           |               | 100,000                                                                                         |
| Operating     | Voltage       | 12V 3A                                                                                          |
|               | Temperature   | -10°C ~ 45°C                                                                                    |
|               | Humidity      | 10% ~ 90%                                                                                       |
|               | Software      | ZKBioSecurity <b>P</b>                                                                          |


## Accessories



Sun canopy



Barrier Bracket  
(Optional)



Power Adapter



Vertical Support  
(Optional)

## Dimensions (mm)

